

GEN II Quick Setup for Buick

Configure Select

"MAF Input" - Set to match your MAF
LS1 3.5 Aluminum - " LS1 Aluminum "
LS1 3.5 Plastic - " 3.5" Plastic "
LT1 3.0 Alum or Plastic - " 3.0" MAF LT1 "
85mm - " LS1/LS6 85mm "

"MAF Output" - Set to match your chip
Extreme G - " GN/EXT PRO "
TurboTweak - " GN Stock MAF "

"RPM/Engine" - Set to match your engine
" 6 Cylinder "

"Displacement" - Set to match your displacement
" 3.8 Liter "


"Load Source"
" Use MAF/RPM "

"Wideband O2"
Select your wideband from list (if using)

"V-Out1 Mode"
If Extreme G chip - "Spark Control "
All other chips - " Use Setpoint "

"V-Out2 Mode"
" Use Setpoint "

GEN II Quick Setup for Buick

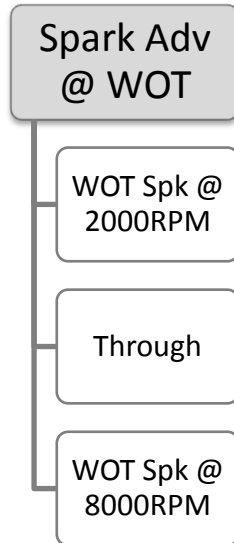

On the Spark Advance Page is where you set the WOT timing. This function is only operational with the Extreme G chip. All other chips do not use this feature. These will be set to the lowest timing by default, which is 15 degrees.